

# QPU Series

Wheel Diameter x Wheel Width 125 x 40mm

EAN

YJ-12035305159871

Good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.

Excellent Hydrolysis Resistance.

Suitable for tropical regions and humid working environments.

QPU brown Wheel Tread with arc shape.



Wheel Center: cast iron core

Wheel Tread: High-quality polyurethane

Bearing: Ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

## Technical Data

Metric  Imperial

Wheel Diameter(D) 125mm

Wheel Width(T2) 40mm

Wheel Bearing Ball Bearing

Axle Bore(d) 17mm

Axle Bore(S) —

Bearing Bore Depth(t) —

Hub Length(T1) 42mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 500kgs

Load Capacity (Static) 750kgs

Temperature -20°C to +70°C

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.23kgs

Standard ISO22883


## Advantages at a glance

Rolling Resistance • • • •

Operating Noise • • • •

Floor Surface Preservation • • • •

## 2D Dimensional Drawing of Single Wheel

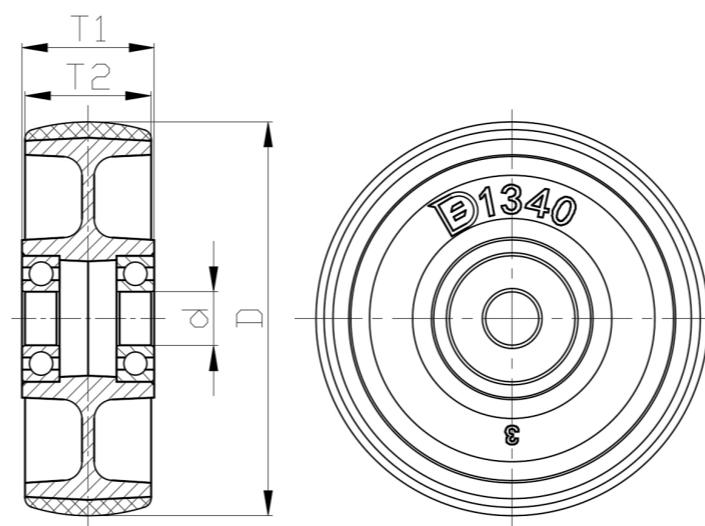

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com