



XPU Series


Wheel Diameter × Wheel Width 230 x 82mm

EAN

YJ-12036109336100

Excellent Mechanical Properties, maintaining Heavy Load during high-speed movement; good wear resistance; not easily deformed.
Excellent resistance to chemicals, solvents, and corrosion.
Suitable for Forklift Trucks, Electric Stackers, Heavy duty machines, AGVs, and automated industrial applications.
XPU, Brown, Curved Wheel Surface

Wheel Center: cast iron core
Wheel Tread: High-quality polyurethane

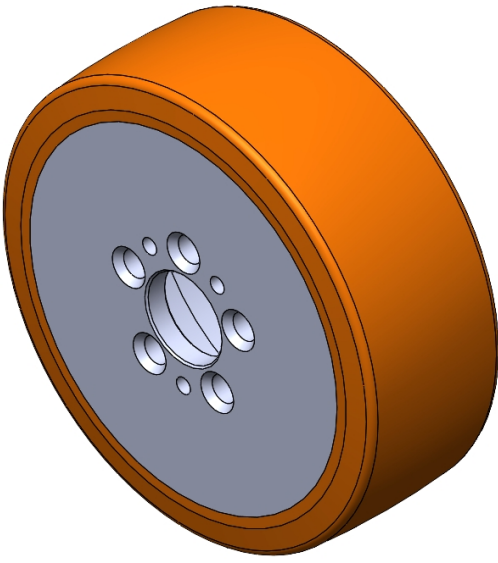

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter （D）	9-1/8
Wheel Width （T2）	3-1/4
Wheel installation — Hub Lenth (T1)	—
Wheel center-bore diameter (d)	1-13/16 "
Wheel Mounting Bolt Hole PCD Diameter	9/16 "
Wheel Mounting Bolt Hole PCD	2-13/16 "
# Of Wheel mounting bolt boles	5
Wheel mounting bolt hole (M)	10
Number of wheel mounting bolt holes	3
Load Capacity (Static)	5291lbs
Load Capacity at 4 km/h	3527lbs
Load Capacity at 6 km/h	2998lbs
Load Capacity at 10 km/h	2469lbs
Load Capacity at 16 km/h	1411lbs
Hardness Of Tread	92±5° Shore A
Temperature	-4°F to +158°F
Tread Pattern	—
Wheel centre/ rim	Cast iron / sprayed with anti-rust oil
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	13.8lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ● ○

2D Dimensional Drawing of Drive Wheel

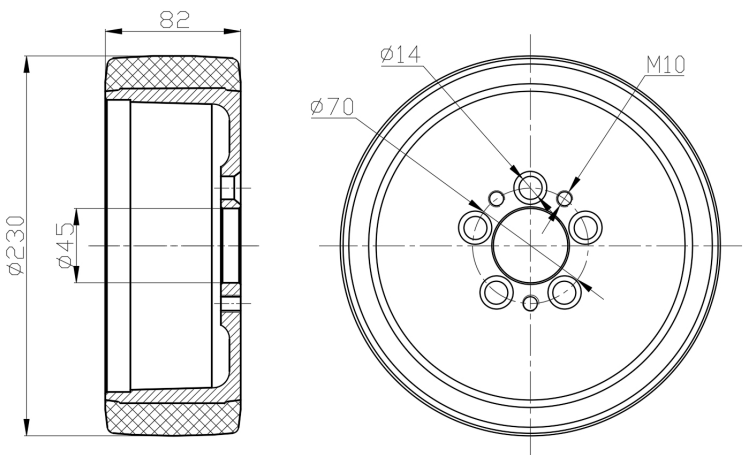

* For any deviation between metric and imperial spec, please refer to the metric spec.