

HPU Series

Wheel Diameter × Wheel Width 200 x 80mm


EAN

YJ-12037708330303

Excellent Mechanical Properties and wear resistance
Excellent resistance to chemicals and corrosion
Suitable for use in Forklift Trucks, Electric Stackers, AGVs, and floor scrubbers
HPU Orange

Wheel Center: Iron core
Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

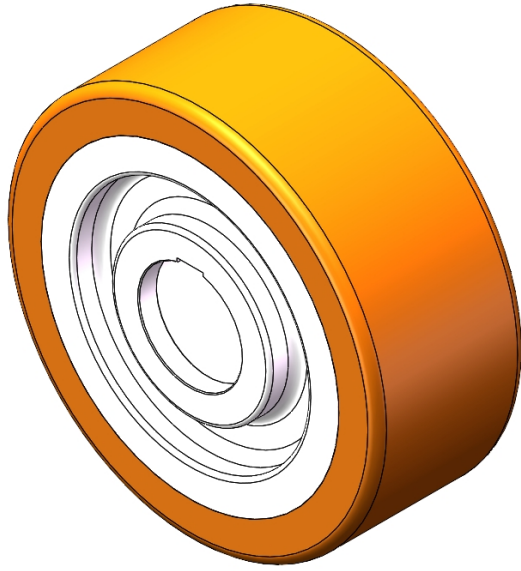

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter (D)	8 "
Wheel Width (T2)	3-3/16 "
Wheel installation — Hub Lenth (T1)	3-3/16 "
Wheel Mounting Bore Diameter	2-3/16 "
Keyway Width	9/16 "
Wheel Keyway Depth (H)	11/16 "
Load Capacity (Static)	3968lbs
Load Capacity at 4 km/h	2646lbs
Load Capacity at 6 km/h	2249lbs
Load Capacity at 10 km/h	1852lbs
Load Capacity at 16 km/h	1058lbs
Hardness Of Tread	92±5° Shore A
Temperature	-4°F to +158°F
Tread Pattern	—
Wheel centre/ rim	Iron core/electroplation
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	20.5lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Drive Wheel

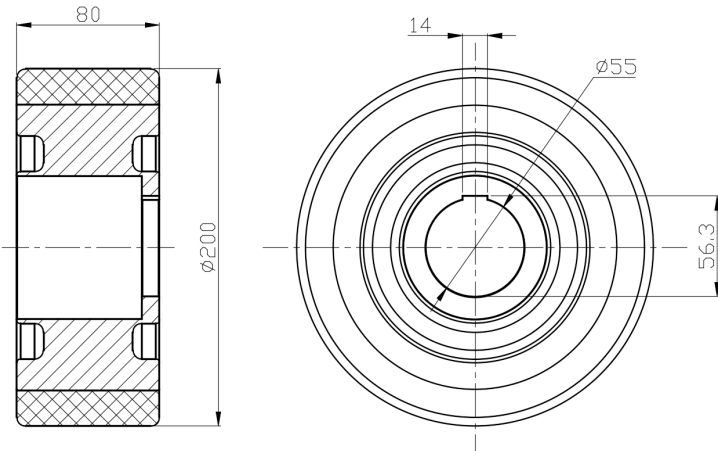

* For any deviation between metric and imperial spec, please refer to the metric spec.