

HPU Series

Wheel Diameter x Wheel Width 250 x 80mm

EAN

YJ-12037710336101

Excellent Mechanical Properties and wear resistance
 Excellent resistance to chemicals and corrosion
 Suitable for use in Forklift Trucks, Electric Stackers, AGVs, and floor scrubbers
 HPU, orange-yellow, Wheel Tread profile: Crown

Wheel Center: cast iron core
 Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.



Picture may differ from original product


Technical Data

<input checked="" type="radio"/> Metric <input type="radio"/> Imperial	
Wheel Diameter (D)	250mm
Wheel Width (T2)	80mm
Wheel installation — Hub Lenth (T1)	—
Wheel center-bore diameter (d)	175mm
Wheel Mounting Bolt Hole PCD Diameter	6.6mm
Wheel Mounting Bolt Hole PCD	190mm
# Of Wheel mounting bolt boles	10
Wheel mounting bolt hole (M)	M6
Number of wheel mounting bolt holes	3
Load Capacity (Static)	2160kgs
Load Capacity at 4 km/h	1440kgs
Load Capacity at 6 km/h	1224kgs
Load Capacity at 10 km/h	1008kgs
Load Capacity at 16 km/h	576kgs
Hardness Of Tread	92±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	—
Wheel centre/ rim	Cast iron / spray-baked black paint
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	4.97kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

2D Dimensional Drawing of Drive Wheel

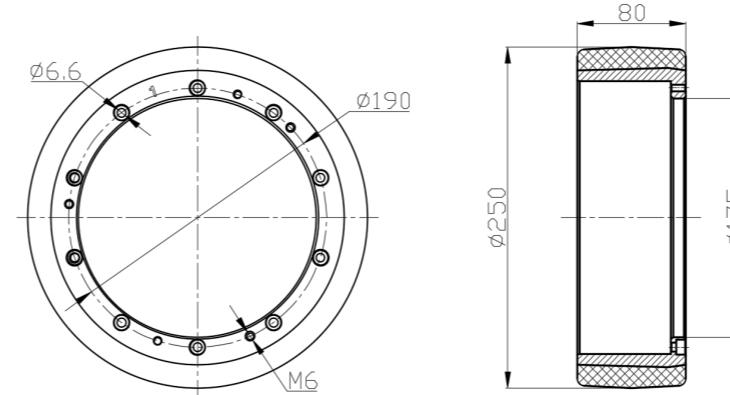

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com