



HPU Series

Wheel Diameter × Wheel Width 310 x 140mm

EAN

YJ-12037712580101

Excellent Mechanical Properties and wear resistance
Excellent resistance to chemicals and corrosion
Suitable for use in Forklift Trucks, Electric Stackers, AGVs, and floor scrubbers
HPU, dark gray, surface machined with random texture A
Increases grip on the ground, effectively improving anti-slip ability

Wheel Center: cast iron core
Wheel Tread: High-quality polyurethane



Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter (D)	310mm
Wheel Width (T2)	140mm
Wheel installation — Hub Lenth (T1)	15mm
Wheel center-bore diameter (d)	80.1mm
Wheel Mounting Bolt Hole PCD Diameter	16mm
Wheel Mounting Bolt Hole PCD	112mm
# Of Wheel mounting bolt boles	6
Wheel mounting bolt hole (M)	—
Number of wheel mounting bolt holes	—
Load Capacity (Static)	2250kgs
Load Capacity at 4 km/h	1500kgs
Load Capacity at 6 km/h	1275kgs
Load Capacity at 10 km/h	1050kgs
Load Capacity at 16 km/h	600kgs
Hardness Of Tread	92±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	Scrambled Pattern A
Wheel centre/ rim	Cast iron / spray-baked black paint
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	21.23kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

2D Dimensional Drawing of Drive Wheel

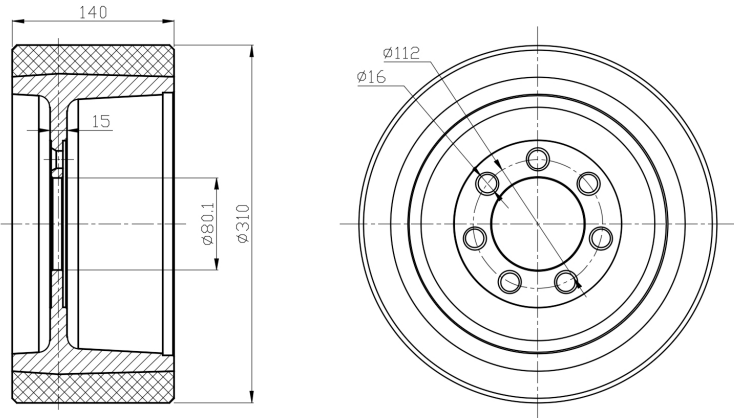

* For any deviation between metric and imperial spec, please refer to the metric spec.