

AXPU Series



Wheel Diameter × Wheel Width 440 x 90mm

EAN

YJ-12038851735114

Excellent Mechanical Properties, maintaining Heavy Load during high-speed movement; good wear resistance; not easily deformed.
Excellent resistance to chemicals, solvents, and corrosion.
Suitable for Forklift Trucks, Electric Stackers, Heavy duty machines, AGVs, and automated industrial applications.
XPU, Burgundy

Wheel Center: Aluminum core
Wheel Tread: High-quality polyurethane



Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter (D)	17-1/2
Wheel Width (T2)	3-9/16 "
Wheel installation — Hub Lenth (T1)	1-1/16 "
Wheel center-bore diameter (d)	3-9/16 "
Wheel Mounting Bolt Hole PCD Diameter	11/16 "
Wheel Mounting Bolt Hole PCD	5 "
# Of Wheel mounting bolt boles	8
Wheel mounting bolt hole (M)	10
Number of wheel mounting bolt holes	4
Load Capacity (Static)	11244lbs
Load Capacity at 4 km/h	7496lbs
Load Capacity at 6 km/h	6371lbs
Load Capacity at 10 km/h	5247lbs
Load Capacity at 16 km/h	2998lbs
Hardness Of Tread	92±5° Shore A
Temperature	-4°F to +158°F
Tread Pattern	—
Wheel centre/ rim	Aluminum
	core/passivation
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	30.6lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Drive Wheel

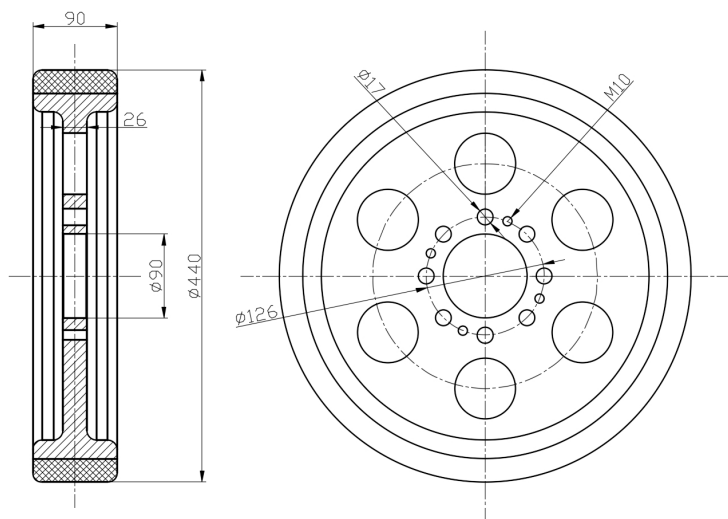

* For any deviation between metric and imperial spec, please refer to the metric spec.