

AHPU Series

Wheel Diameter × Wheel Width 110 x 16mm


EAN

YJ-12039654080114

Excellent Mechanical Properties and wear resistance
Excellent resistance to chemicals and corrosion
Suitable for use in Forklift Trucks, Electric Stackers, AGVs, and floor scrubbers
HPU, orange-yellow, Wheel Tread profile: Crown

Wheel Center: Aluminum core
Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

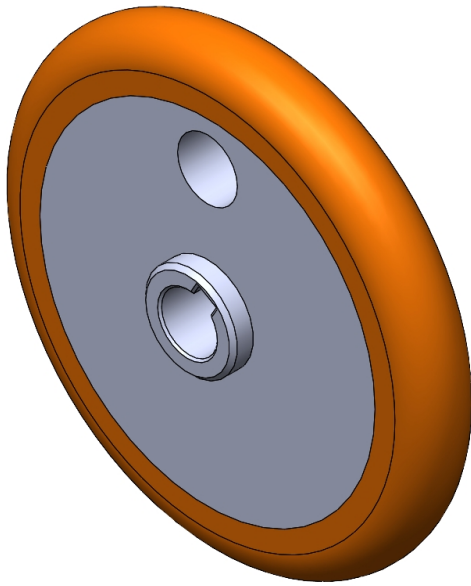

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter (D)	110mm
Wheel Width (T2)	16mm
Wheel installation — Hub Lenth (T1)	21mm
Wheel Mounting Bore Diameter	14mm
Keyway Width	5mm
Wheel Keyway Depth (H)	16.3mm
Load Capacity (Static)	270kgs
Load Capacity at 4 km/h	180kgs
Load Capacity at 6 km/h	153kgs
Load Capacity at 10 km/h	126kgs
Load Capacity at 16 km/h	72kgs
Hardness Of Tread	92±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	—
Wheel centre/ rim	Aluminum core/passivation
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	0.31kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Drive Wheel

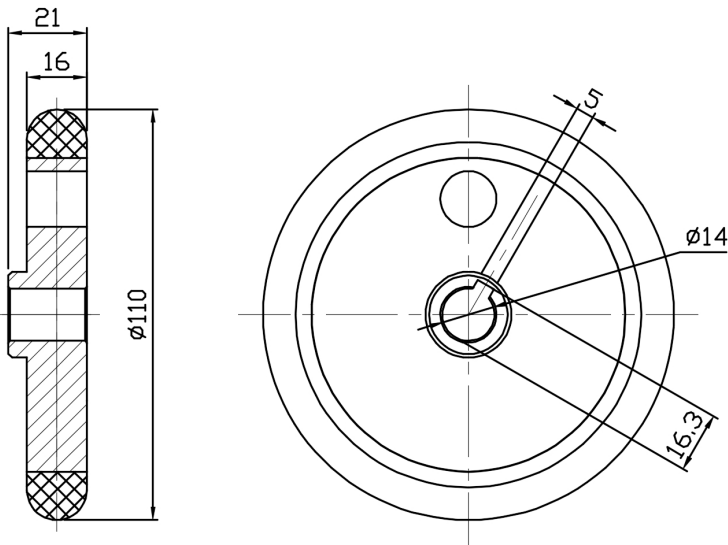

* For any deviation between metric and imperial spec, please refer to the metric spec.