

NBR Series

Wheel Diameter x Wheel Width 245 x 48mm

EAN

YJ-12041610186271

Made of High-Quality Resilient Rubber Features excellent handling comfort, good Floor Surface Preservation, and Shock-Absorbing. Excellent resistance to chemicals, solvents, and corrosion. Suitable for industrial and heavy-duty wheels. Rubber, Black, Curved Surface, Patterned Wheel Tread. Increases grip and effectively improves slip resistance.



Wheel Center: cast iron core

Outer packaging: rubber

Bearing: Ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter(D) 9-3/4

Wheel Width(T2) 1-15/16 "

Wheel Bearing Ball Bearing

Axle Bore(d) 1 "

Axle Bore(S) —

Bearing Bore Depth(t) —

Hub Length(T1) 1-7/8 "

Hardness Of Tread 85±5° Shore A

Load Capacity (Dynamic) 882lbs

Load Capacity (Static) 1323lbs

Temperature -4°F to +176°F

Electrical Conductivity N/A

Anti-Static N/A

Weight 8.6lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • o o

Operating Noise • • • • o

Floor Surface Preservation • • • • o

2D Dimensional Drawing of Single Wheel

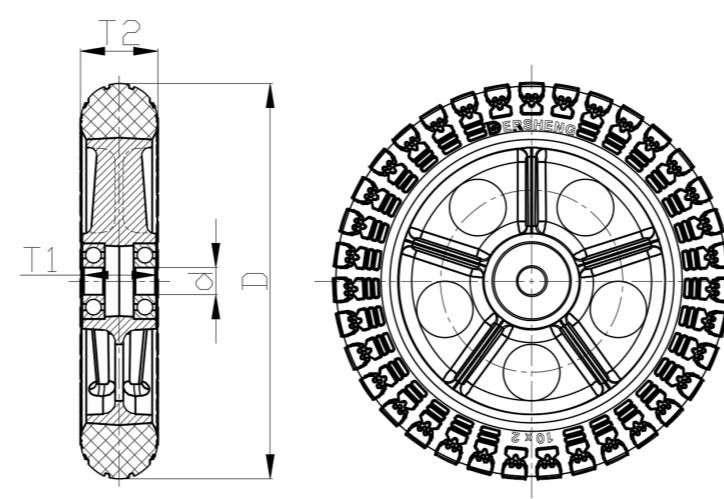

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com