



1110-2 Light Duty Wire & Shelving/Display Series

Wheel diameter × Wheel width 75×21 mm


EAN

YJ-W11100300297413

Swivel Casters, mortise-and-tenon Stamping Fork—Ø11x50L
Zine-Plated surface, mortise-and-tenon Mounting Type device, with brass buckles
Polypropylene Wheel Center and Wheel Tread
Black, Plain Bearings.

Wheel surface: PP polypropylene
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

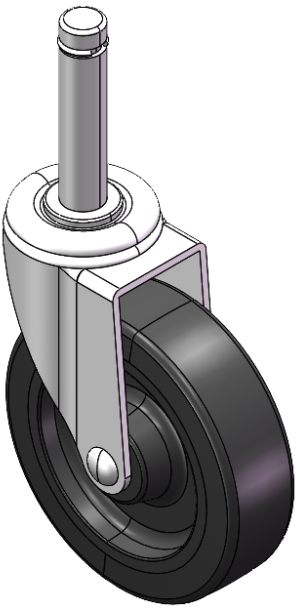

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	3 "
Wheel Width	7/8 "
Wheel Bearing	Wheel With Plain Bearing
Stem Diameter	3/8 "
Stem Length	2 "
Offset	7/8 "
Swivel Interference	4-11/16 "
Overall Height	3-3/4 "
Swivel Radius	2-3/8 "
Hardness Of Tread	65±5° Shore D
Load Capacity (Dynamic)	88lbs
Load Capacity (Static)	132lbs
Temperature	14°F to +140°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	0.5lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ○ ○
Floor Surface Preservation	● ● ● ○ ○

Dimensions

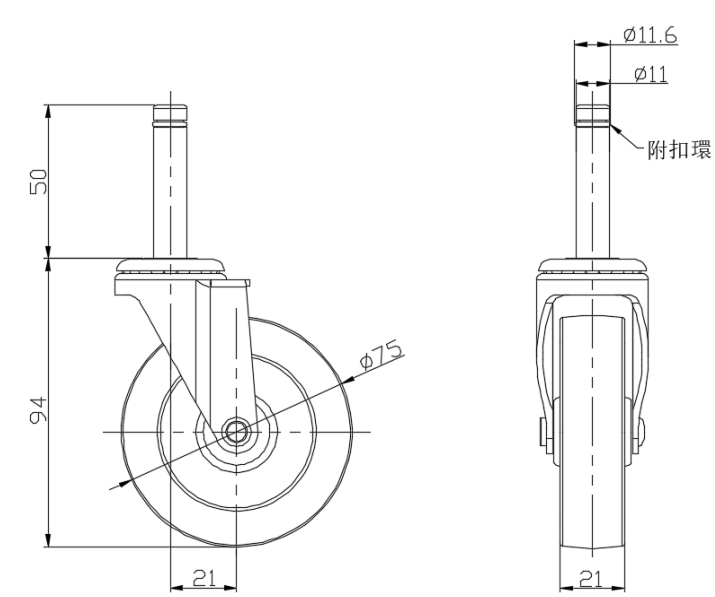

Mounting

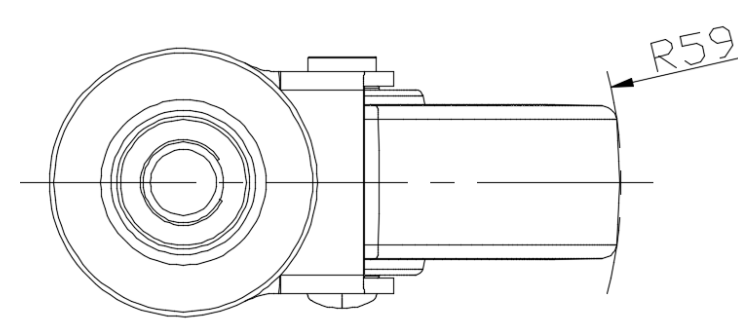

* For any deviation between metric and imperial spec, please refer to the metric spec.