1127 Series — H-3 Series

Dersheng Casters Keep Rolling

PPP (White and Black) Wheel Diameter × Wheel Width 40×20mm


EAN

YJ-W11270150296014

Casters with Total Brakes and a Locking system. Thread-Riveted Stamping Fork—M8-P1.25. Zine-Plated, Mounting Type - Threaded Stem. Polypropylene Wheel Center and tread. White and black. Bearing—Ball Bearing.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 40mm
Wheel Width 20mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M8-P1.25

Threaded Size 25mm

Offset 16.5mm

Swivel Interference 132.2mm

Overall Height 60mm

Swivel Radius 66.1mm

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 40kgs
Load Capacity (Static) 60kgs

Temperature -10°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.16kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

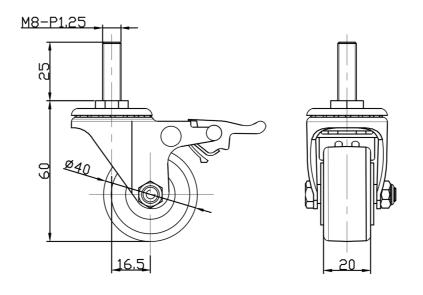



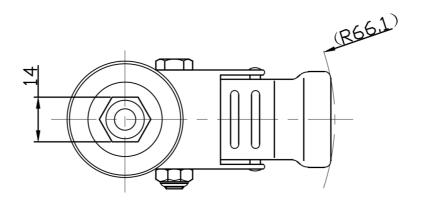

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.