1127 Series — H-3 Series

Dersheng Casters Keep Rolling

PPP (White and Black) Wheel Diameter × Wheel Width 50×23mm


EAN

YJ-W11270200292014

Swivel Caster with Stamping Fabricated Caster Fork and European standard holes. Surface electroplating, Mounting Type - Top Plate. Polypropylene Wheel Center and tread. White or black. Bearing: Ball Bearing.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Plate Size

● Metric ○ Imperial

Wheel Diameter 50mm
Wheel Width 23mm

Wheel Bearing Wheels With Ball Bearings

69 x 49mm

Bolt Hole Spacing 52 x 35mm

Plate Hole 10.7 x 8.1mm

Offset 20mm

Swivel Interference 90mm

Overall Height 71mm

Swivel Radius 45mm

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 50kgs

Load Capacity (Static) 75kgs

Temperature -10°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A


Weight 0.21kgs

Standard ISO22883


Advantages at a glance

Floor Surface Preservation • • • • • •

Dimensions

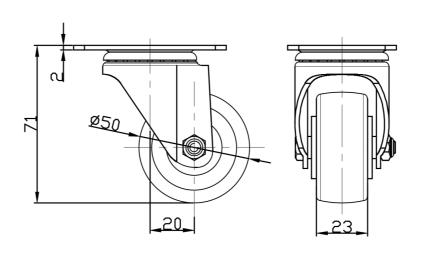

Mounting

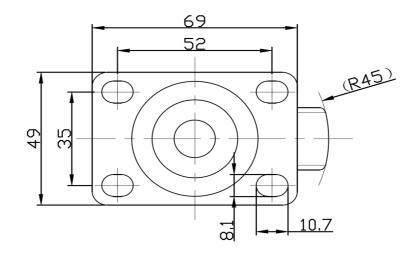

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.