1127 Series — H-3 Series

PPP (White and Black) Wheel Diameter × Wheel Width 50×23mm


EAN

YJ-W11270200296024

Casters with Total Brakes and a Locking system. Threaded, Riveted, Stamping Fork—M8-P1.25. Surface electroplating, Mounting Type - Threaded Stem. Polypropylene Wheel Center and tread. White and black. Bearing—Ball Bearing.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 50mm
Wheel Width 23mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M8-P1.25

Threaded Size 25mm

Offset 20mm

Swivel Interference 154mm

Overall Height 73mm

Swivel Radius 77mm

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 50kgs
Load Capacity (Static) 75kgs

Temperature -10°C to +60°C

Fork Type Swivel Caster With Total Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.23kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • • •

Operating Noise


• • • • •

Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions

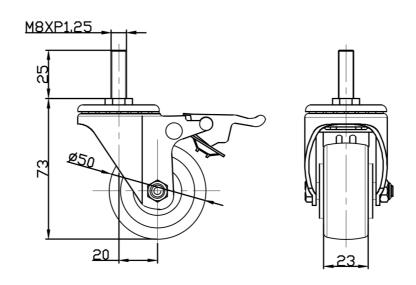

Mounting

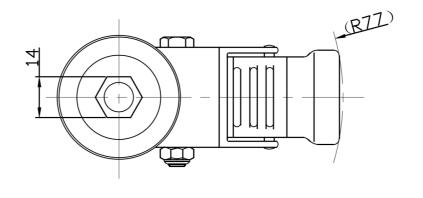

 $[\]boldsymbol{\ast}$ For any deviation between metric and imperial spec, please refer to the metric spec.