1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 100 x 31mm

EAN


YJ-X11290400265023

Swivel Caster, thread-Riveted Stamping Fork—M12-P1.75
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
Dark gray color, Bearing—Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter

Wheel Width 1-1/4 "

Wheel Bearing Wheels With Ball Bearings

4 "

Threaded Stem M12-P1.75

Threaded Length 13/16 "

Offset 2-3/16 "

Swivel Interference 10-3/8 "

Overall Height 7-1/2 "

Swivel Radius 3-9/16 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 198lbs

Load Capacity (Static) 298lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.3lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • 0

Operating Noise


• • • • 0

Floor Surface Preservation • • • • •

Dimensions

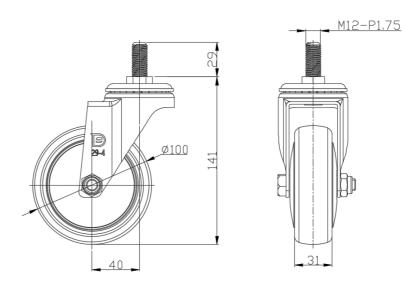

Mounting

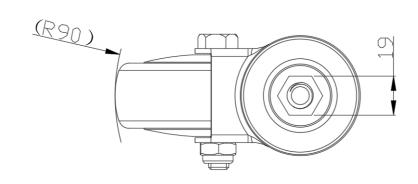

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.