## 1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 125 x 31mm

EAN


YJ-X11290500265023

Swivel Caster with Riveted, Stamping Fork—M12-P1.75
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced
Polypropylene Rubber (TPR) Wheel Tread
Pearl-gray finish, Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

## Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-1/4"

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M12-P1.75

Threaded Length 1-3/16 "

Offset 1-1/2 "

Swivel Interference 8 "

Overall Height 6-9/16 "

Swivel Radius 4 "

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 220lbs

Load Capacity (Static) 331lbs

Temperature -4°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.5lbs

Standard ISO22883

## Advantages at a glance

Rolling Resistance


• • • •


Operating Noise

• • • • 0


Floor Surface Preservation • • • • •

## **Dimensions**





Mounting

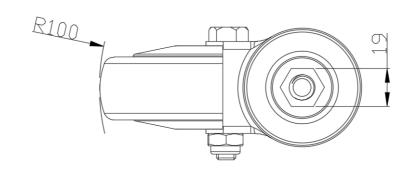

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.